

# DATA LOGGER SPECIFICATION



**JULY 28 <> AUG 2  
2025**

<DATA LOGGER SPEC>

**#FSEASTJULY28<>AUG2**

RELEASE

**VERSION 1.0**

RELEASE DATE: 05TH OF JUNE 2025

FURTHER DETAILS AT [FSEAST.EU](https://fseast.eu)

**#FSEAST #FSEASTJULY28<>AUG2**

**PARTS PROVIDED BY THE ORGANISER FOR EV (INCLUDING DV WITH EV DRIVETRAIN) VEHICLES:**

- Current- and voltage-sensor with mounting assembly
- Data logger electronics with optional mounting plate
- Sensor cable (more information later in this document)
- Power supply cable (more information later in this document)


Note: Data Logger for DV vehicles with CV drivetrain is optional  
 For DV vehicles sending the RES CAN to the Data Logger is optional

Paramter	Minimum	Typical	Maximum
LV supply voltage	10VDC	-	60VDC
LV supply current	-	160mA @ 10VDC 130mA @ 12VDC 80mA @ 24VDC 45mA @ 48VDC 40mA @ 60VDC	320mA @ 10VDC 260mA @ 12VDC 160mA @ 24VDC 90mA @ 48VDC 80mA @ 60VDC
RES CAN termination	No termination		
RES CAN speed	500kbit/s		




**SENSOR ASSEMBLY**


**SENSOR ASSEMBLY | CURRENT- AND VOLTAGE:**  
 (Drawing and step model provided in the FS East data logger information pack.)

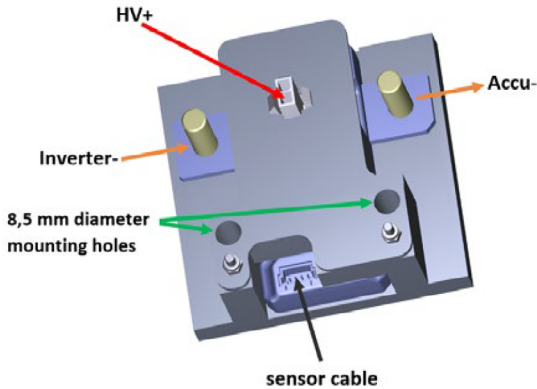


**SENSOR ASSEMBLY COVER:**



**SENSOR ASSEMBLY WITH COVER AND CABLE LUGS:**

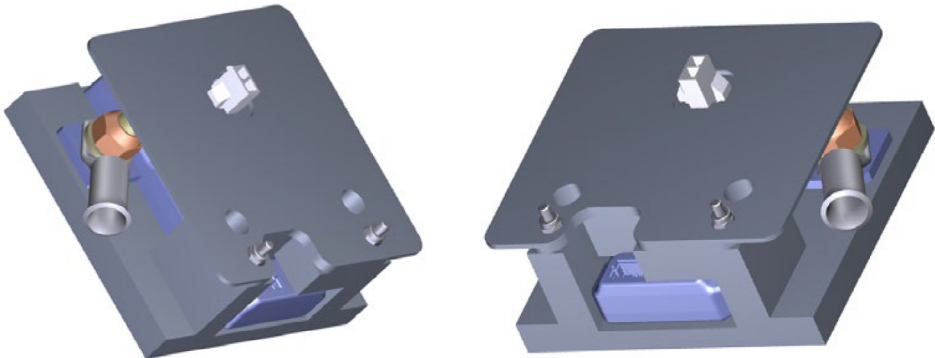

< **LOGGER** >

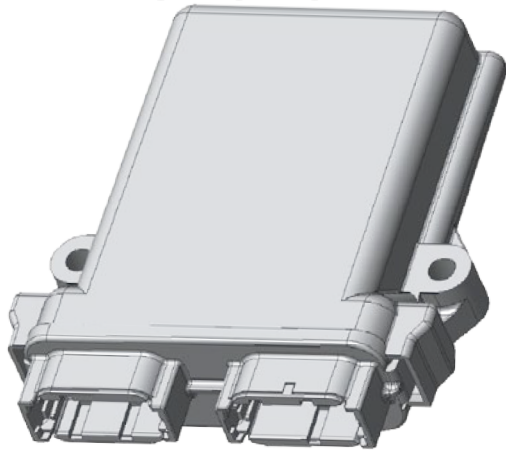

**DATA LOGGER ASSEMBLY**


**DATA LOGGER:**

(Drawing and step model provided in the FS East data logger information pack.  
 You may mount the data logger in/to any other component of the vehicle,  
 but please pay attention to:


- Sensor cable length
- Power supply cable length
- The data logger transmits the data using WiFi connection.  
The officials will download the log between dynamic runs, so they must be able to connect to the data logger.

**DATA LOGGER MOUNTING PLATE:**

(This is an optional part to mount the data logger on the main hoop.)

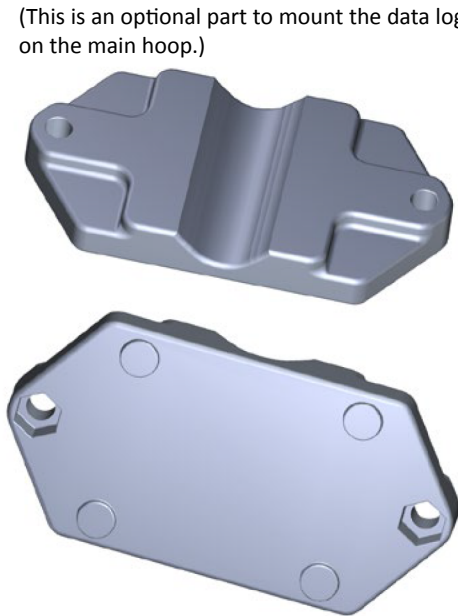

**DATA LOGGER ASSEMBLY:**

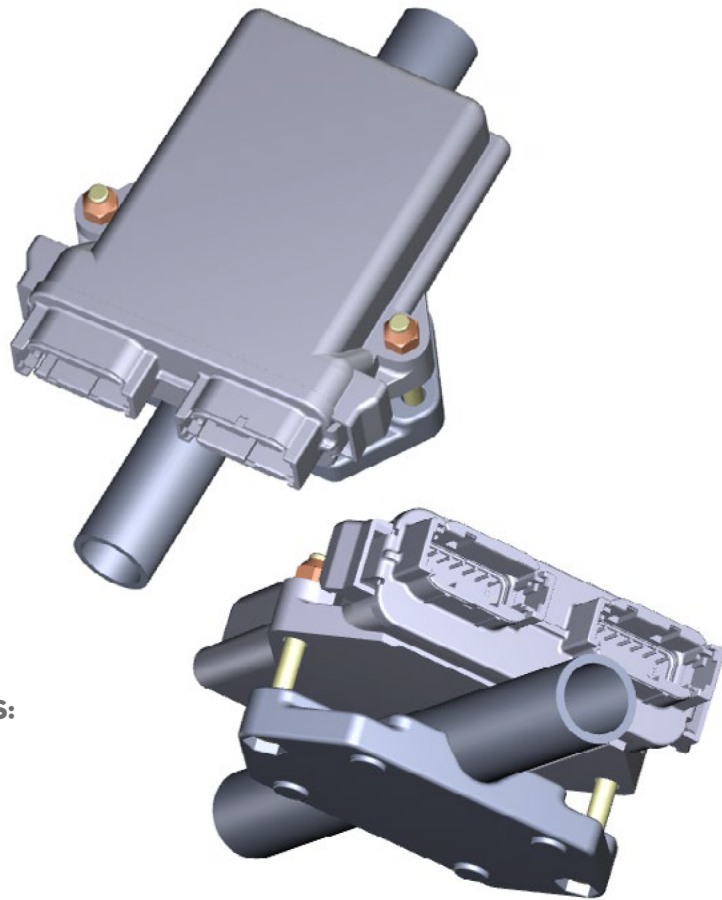

**SENSOR ASSEMBLY CONNECTIONS/CONNECTORS:**

1. Battery- connection  
M8, 10.9 bolt
2. Inverter- connection  
M8, 10.9 bolt
3. HV+ connector (sensor side):  
Mini-Fit Jr. Series, Plug, 2 Ways, 4.2 mm  
Molex: 39-01-2026  
Farnell: 1697125  
(Pin contacts on the sensor side.)


**RECOMMENDED PARTS FOR THE HV+ CONNECTION (VEHICLE SIDE)(PROVIDED BY THE TEAM):**

1. HV+ connector:  
Mini-Fit Jr. Series, Receptacle, 2 Ways, 4.2 mm  
Molex: 39-01-2020  
Farnell: 151866
2. HV+ connector's socket contact:  
Molex: 39-00-0429  
Farnell: 2063721
3. HV+ wire:  
Wire, Stranded, Hook Up MIL-W-76B Type MW, PVC, Orange, 20 AWG, 0.51 mm<sup>2</sup>  
Voltage rating: 1kV  
Alpha wire: 1553 OR005  
Farnell: 2291077

SENSOR CABLE ASSEMBLY:


					Recommendations			
	Connector type	Part name	Manufacturer	Part number	Distributor	Order number	OPTION A	OPTION B
Data logger side	DTM06 series	Connector housing	TE connectivity	DTM06-12SB	mouser	571-DTM06-12SB	provided by organizer	provided by the team
		Pin	TE connectivity	1062-20-0222	mouser	571-1062-20-0222-LP	provided by organizer	provided by the team
		Wedgelock	TE connectivity	WM-12S	farnell	2138288	provided by organizer	provided by the team
Sensor side	DuraClik ISL RECPT HSG 4CKT	Connector housing	Molex	560123-0400	mouser	538-560123-0400	provided by organizer	provided by the team
		Pin	Molex	560124-0101	mouser	538-560124-0101-CT	provided by organizer	provided by the team

Pin No. at data logger side	Signal	Pin No. at sensor side
B2	12V	4
B3	GND	1
B12	CANL	3
B11	CANH	2

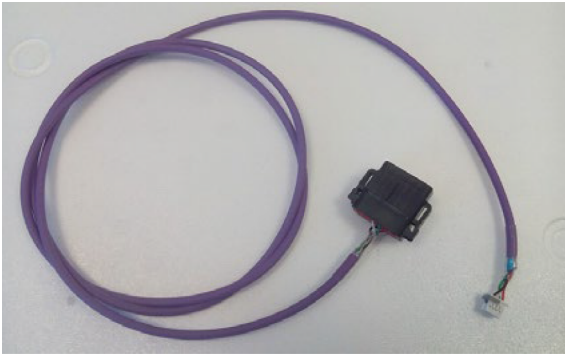

OPTION A: PROVIDED BY THE ORGANIZER

- Connector - sensor side  
DuraClik ISL RECPT HSG 4CKT, see table for more information (Drawing and step model provided in the FS East data logger information pack.)
- Connector - data logger side  
DTM-12B type, see table for more information
- Cable  
Outer diameter max: 8 mm (this is only the diameter of the cable, without the connectors)  
Outer diameter min: 4 mm  
Length: 1,5 m



OPTION B: PROVIDED BY THE TEAM

The team provides the cable assembly as the part of the car wire harness, connector type definitions can be found in the table above

DATA LOGGER POWER SUPPLY AND RES CAN CABLE ASSEMBLY:

					Recommendations			
	Connector type	Part name	Manufacturer	Part number	Distributor	Order number	non DV EV	DV
Data logger side	DTM06 series	Connector housing	TE connectivity	DTM06-12SA	mouser	571-DTM06-12SA	provided by organizer	provided by organizer or by the team
		Pin	TE connectivity	1062-20-0222	mouser	571-1062-20-0222-LP	provided by organizer	provided by organizer or by the team
		Wedgelock (needed part, not optional!)	TE connectivity	WM-12S	farnell	2138288	provided by organizer	provided by organizer or by the team
Car harness side plug	ATM series	Connector housing	Amphenol	ATM06-2S	x	x	provided by organizer	optional
Car harness side receptacle (part of the car wire harness)	ATM series	Connector housing	Amphenol	ATM04-2P	farnell	2361175	provided by the team	provided by the team or not applicable
		Pin machined	Amphenol	AT60-202-20141	farnell	2361204	provided by the team	provided by the team or not applicable
		Pin stamped	Amphenol	AT60-20-0122	farnell	2361202 , 2529244	provided by the team	provided by the team or not applicable
		Wedgelock (needed part, not optional!)	Amphenol	AWM-2P	farnell	2318739	provided by the team	provided by the team or not applicable

Pin No. at data logger side	Signal
A1	10-60VDC supply
A12	iGND
A3	CANH
A4	CANL



FOR EV (NON DV) VEHICLES (ONLY POWER SUPPLY IS NEEDED) (PROVIDED BY THE ORGANIZER):

- Connector - data logger side  
DTM-12SA
- Connector - vehicle side  
ATM Series, Plug, 2 Ways (with socket contacts)
- Cable  
Outer diameter max: 8 mm (this is only the diameter of the cable, without the connectors)  
Outer diameter min: 4 mm  
Length: 1,5 m





# FORMULA STUDENT EAST

## FOR DV VEHICLES (POWER SUPPLY AND RES OPTIONALLY CAN BUS) (PROVIDED BY THE TEAM):

Two options:

- The team provides the whole cable assembly as the part of the car wire harness
  - The ATM series intermediate connector is optional in this case
  - CAN communication is possible with 500 kbit/s
- Only power supply is provided to the data logger
  - DV team can use the power supply cable provided by the organizer in this case

## RES CAN DATA SPECIFICATION (DV ONLY)(OPTIONAL)

The Remote Emergency System (RES) and the data logger must share the same CAN bus.

The RES has to be configured to Node-ID 0x011 with 500 kbit/s CAN speed

The DV vehicle state must be provided as a CAN message defined by the following table with 100ms cycle time:


CAN-ID	Name	Length	Format
0x502	DV system status	5 B	
	ASSI_state_off		1
	ASSI_state_ready		2
	ASSI_state_driving	bit 0-2	3
	ASSI_state_emergency_brake		4
	ASSI_state_finish		5
	EBS_state_unavailable		1
	EBS_state_armed	bit 3-4	2
	EBS_state_triggered		3
	AMI_state_acceleration		1
	AMI_state_skidpad		2
	AMI_state_trackdrive	bit 5-7	3
	AMI_state_braketest		4
	AMI_state_inspection		5
	Steering_state	bit 8	bool
	Service_brake_state_disengaged		1
	Service_brake_state_engaged	bit 9-10	2
	Service_brake_state_available		3
	Lap_counter	bit 11-14	unsigned
	Cones_count_actual	bit 15-22	unsigned
	Cones_count_all	bit 23-39	unsigned

JULY28<>AUG2  
2025

#FSEASTJULY28<>AUG2

## CHANGELOG

Version	Date	Modification	Page
1.0.0	5th of June 2025	Initial release	-



Részletek vagy az egész dokumentum felhasználása csakis a Járműmérnökök Egyesülete előzetes írásos engedélyével lehetséges.  
Copyright Járműmérnökök Egyesülete 2018 - 2025.

No part of this document or the whole publication may be used without the prior written permission of Association of Automotive Engineers.  
Copyright Association of Automotive Engineers 2018 - 2025.